



XCMG **Product Line Brochure**

XCMG FOR YOUR SUCCESS \\\\

Products

- Hoisting Machinery
- Earthmoving Machinery
- **Mining Machinery**
- Road Building Machinery
- Sanitation Machinery
- Concrete Machinery
- Special Vehicles
- Piling Machinery
- **Heavy-duty Trucks**
- **Emergency Rescue Vehicle**
- **Others**

Under our policy of continuous product development and improvement, we reserve the right to change specifications and design without prior notice. Featured machines in photos may include additional equipment. Consult your XCMG dealer for available options and attachments.

For more complete information on XCMG products, dealer services and industry solutions, visit us on the web at www.xcmg.com

XCMG, XCMG for Your Success and www.xcmg.com, as well as corporate and product identity used herein are trademarks of XCMG and may not be used without permission.

Ref. No.XCMG210201P English Printed in China 2021.02 **XCMG**







E-business

XUZHOU CONSTRUCTION MACHINERY GROUP IMP. & EXP. CO., LTD






Asia-Pacific

Central Asia Europe

West Asia & North Afica



(+86-516) 87739702 87739202 87739223









XCMG BRIEFING

XCMG, an iconic brand of construction machinery industry in China, was born in 1943 at the No.8 Arsenal Factory in southern Shandong. Since 1989 when it was designated as the reform pilot of corporate groups in China, XCMG has remained No. 1 in China's industry of construction machinery. At present, it ranks No. 4 in the world and is one of the World Top 500 brands.

XCMG owns more than 60 enterprises in complete vehicles, parts and components, trade and new business forms, covering 8 business sectors in construction machinery, mining machinery, heavy-duty trucks, sanitation equipment, core parts and components, fabricated buildings, financial services and information technology.

As the pioneer and leader of construction machinery industry in China, XCMG is largest construction machinery manufacturer with longest history in China that supplies the most diverse product lineup, core parts and components. It is also the most innovative and international manufacturer with the largest export volumes.

In the 1950s and 1960s, XCMG produced the first construction machinery in China, including cranes and road rollers, which contributed to the construction projects in the newly-established China. Nowadays, XCMG has more than 100 of industry's first and top machinery in China, e.g., the world's largest crane and China's largest excavator. Besides, XCMG also has 9 championship enterprises and products in 5 business sectors. The market shares of its 9 product categories take the first place in China, among which its mobile crane has the world's largest share. Besides, its complete sets of concrete machinery and piling machinery have their market shares taking the first two places in the world.

XCMG has the national-level key laboratory and industrial design center. It has China's best national-level corporate R&D center. XCMG has successfully built the Hanyun Industrial Internet Platform and entered top three in the industrial Internet field. It was awarded as the national-level intelligent manufacturing benchmark enterprise and pilot project. Besides, it has two national-level green factory and one national model enterprise of green supply chain management. Its products are exported to 187 countries and regions. It has R&D centers, manufacturing facilities and KD factories in more than 10 countries such as Germany, Brazil, the United States, and India. Moreover, XCMG has acquired three European companies such as Schwing in Germany. It has invested more than RMB 3 billion in 97% of the countries along the Belt and Road. Its annual export and overseas revenues take the first place in China in the industry.

Adhering to the core values of "taking great responsibilities, acting with great morals and making great achievements", XCMG assumes social responsibility. It has been awarded the title of "Hero Collective for Earthquake Relief and Disaster Relief" by the CPC Central Committee, the State Council and the Central Military Commission. For twice, it has won the China Industry Award, which is the highest honor in the industry in China. Besides, XCMG has won the National Quality Award and National Model Enterprise for Harmonious Labor Relations.

On December 12, 2017, General Secretary Xi Jinping visited XCMG and fully affirmed XCMG's achievements. He highly praised XCMG as a very important and successful modern group. Xi believed that XCMG, with a glorious history, will have a better future.

XCMG will never forget its original mission of serving the country. XCMG will, on the basis of becoming a Top Four construction machinery manufacturer in the world in 2020, strive to enter top three in the world industry and become one of Fortune Top 500 companies in the world. To this end, XCMG will make utmost efforts to become the world's first-class company with global competitiveness.























XCMG MARKETING NETWORK



HOISTING MACHINERY

TRUCK CRANE ------



XCT8L4_1

Max.Total Rated Lifting Load: 8t Max.Load Moment of Base Boom: 318kN.m Dead Weight in Travel State: 13160kg Rated Power: 103kw/2600rpm



TOO

Max. Total Rated Lifting Load: 50t

Max Total Rated Lifting Load - 70t

Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom:

Load Moment of Base Boom: 3528kN d Weight in Travel State: 48000kg

Max.Load Moment of Base Boom: 203 Dead Weight in Travel State: 44000kg Rated Power: 268kw/1900rpm

Max. Total Rated Lifting Load: 30t

Max. Load Moment of Base Boom: 965kN · m Dead Weight in Travel State: 28700kg Rated Power:192/2200kW/r/min

Max. Load Moment of Base Boom: 2009kN · m Dead Weight in Travel State: 40100kg Rated Power:(247kw/2200rpm)/(249kw/1900rpm)

.

m: 2033kN.m

XCT25L4_Y

XCT30 Y

XCT50_Y

XCT70_S

Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 965kN - m Dead Weight in Travel State: 27500kg Rated Power:(192kw/2200rpm)/(192kw/2300rpm)



XCT12L4_1

XCT25L4_SR Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 961kN.m Dead Weight in Travel State: 28000kg Rated Power: 192kw/2300rpm

Max. Total Rated Lifting Load: 50t

400

Max. Total Rated Lifting Load:75t

000000

Max. Load Moment of Base Boom: 3175kN Dead Weight in Travel State: 46000kg Rated Power: 268kw/1900rpm

Max. Load Moment of Base Boom: 2009kN Dead Weight in Travel State: 40330kg Rated Power: 247kw/2200rpm

651

Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 965kN Dead Weight in Travel State: 30000kg Rated Power: 192/2200kW/r/min

хстзо м

XCT50_M

Max.Total Rated Lifting Load: 12t Max.Load Moment of Base Boom: 510kN.m Dead Weight in Travel State: 17100kg Rated Power: 162kw/2300rpm

Max.Total Rated Lifting Load: 16t Max.Load Moment of Base Boom: 735kN.m Dead Weight in Travel State: 23300kg Rated Power: 180kw/2300rpm

Max. Total Rated Lifting Load: 30t

Max.Total Rated Lifting Load: 55t

Max Total Rated Lifting Load - 80t

010-1000

Max.Total Rated Lifting Load: 110t Max.Load Moment of Base Boom:

XCT110_1

XCA100 E

XCA180

XCA400

4....

4

Max. Load Moment of Base Boom: 1132kN · m Dead Weight in Travel State: 33000kg Rated Power: 245/1900kW/r/min

Max.Load Moment of Base Boom: 2009kN.m Dead Weight in Travel State: 40600kg Rated Power: 276kw/2200rpm

Max.Load Moment of Base Boom: 3381kN.m Dead Weight in Travel State: 48000kg/50000kg Rated Power: 297kw/1900rpm

XCT30 S

XCT55_S

§ CO

XCT16_1

XCT25L5_2 Max.Total Rated Lifting Load: 25t

Max.Load Moment of Base Boom: 1249kN.m Dead Weight in Travel State: 34000kg Rated Power: 235kw/1900rpm

Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 988kN.m

1000000

Max. Total Rated Lifting Load: 80t

Max. Load Moment of Base Boom: 2587kN · m Dead Weight in Travel State: 46000kg Rated Power: 264kw/2100rpm

XCT25L5_SR

QY40KC_1

XCT60L5

XCT80_Y

Dead Weight in Travel State: 30000kg

20.100

Max.Total Rated Lifting Load: 16t

Max.Load Moment of Base Boom: 730kN.m Dead Weight in Travel State: 23300kg Rated Power: 192kw/2200rpm

XCT16_Y

1000000 -000

XCT35 U Max.Total Rated Lifting Load: 40t Max.Load Moment of Base Boom: 1600kN.m Dead Weight in Travel State: 39400kg Rated Power: 251kw/1900rpm

20...00

Max.Total Rated Lifting Load: 20t

00...001

Max. Total Rated Lifting Load: 25t

Max.Load Moment of Base Boom: 860kN.m Dead Weight in Travel State: 26100kg Rated Power: 192kw/2200rpm

Max. Load Moment of Base Boom: 965kN · m Dead Weight in Travel State: 30600kg Rated Power:(192kw/2200rpm)/(192kw/2300rpm)

QY20K_Y

XCT25L5_Y

Max.Total Rated Lifting Load: 35ust Max.Load Moment of Base Boom:484

XCT25L5 S

Rated Power: 245/1900kW/r/min

Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 961kN.m Dead Weight in Travel State: 28000kg Rated Power: 192kw/2300rpm

XCT25L4_S

Max. Total Rated Lifting Load: 25t Max. Load Moment of Base Boom: 988kN · m Dead Weight in Travel State: 31000kg

XCT40U

Max. Total Rated Lifting Load: 40ust Max. Load Moment of Base Boom: 708000lbf.ft Dead Weight in Travel State: 66100lb

1200 XCT60_Y XCT60_M

Max. Total Rated Lifting Load: 60t

Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 2205kN.m Dead Weight in Travel State: 46000kg Max. Load Moment of Base Boom: 2009kN Dead Weight in Travel State: 41700kg Rated Power: 268kw/1900rpm

Max. Total Rated Lifting Load: 60t

Rated Power: 247kw/2200rpm

Max. Load Moment of Base Boom: 2009kN · m Dead Weight in Travel State: 42200kg Rated Power: 247kw/2200rpm

-

XCT80_S

Max. Total Rated Lifting Load: 80t Max. Load Moment of Base Boom: 3175kN · m Dead Weight in Travel State: 48000kg Rated Power: 276kw/2000rpm

XCT85_M Max. Total Rated Lifting Load: 85t Max. Load Moment of Base Boom: 3175kN · m Dead Weight in Travel State: 46000kg Rated Power: 247kw/2200rpm

• ALL TERRAIN CRANE ·····

XCT100_M

Police XCA60 Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 1858kN · m Dead Weight in Travel State: 36000kg Rated Power: 260/1900kW/r/min

Max.Load Moment of Base Boom: Dead Weight in Travel State: 5499 Rated Power: 3Ect. 199

XCT100 1

Max.Total Rate Max.Load Mom

XCA60 E

XCA130 E

XCA300-I

XCA750

Max. Total Rated Lifting Load: 60t Max. Load Moment of Base Boom: 1858kN · m Dead Weight in Travel State: 36000kg Rated Power: 280/1700kW/r/min

Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 4468kl Dead Weight in Travel State: 60000kg Rated Power: 360/1700kW/r/min

00.0010011

ted Lifting Load 100t

200 00

Մ. 4468kN ∙ m

Max.Load Moment of Base Boom: 49: Dead Weight in Travel State: 54990kg

Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 3000kN · m Dead Weight in Travel State: 48000kg Rated Power: (340/1700)/(129/2200)kW/r/min

Max. Total Rated Lifting Load: 180t Max. Load Moment of Base Boom: 5598kl Dead Weight in Travel State: 60000kg Rated Power: 356/1900kW/r/min

00.00

Max.Total Rated Lifting Load: 400t Max.Load Moment of Base Boom: 12348kN.m Dead Weight in Travel State: 55000kg Rated Power: 482.2kw/1800rpm

- 5598kN · m

4939kN.m

XCT130_1 Max.Total Rated Lifting Load: 130t Max.Load Moment of Base Boom: 5200kN.m Dead Weight in Travel State: 54990kg

000-000

XCA1600

200 000 XCA100 S Max. Total Rated Lifting Load: 100t Max. Load Moment of Base Boom: 2689kN · m Dead Weight in Travel State: 48000kg Rated Power: (324/1900)/(145/2200)kW/r/min

20.0000

Max.Total Rated Lifting Load: 200t Max.Load Moment of Base Boom: 666 Dead Weight in Travel State: 54990kg Rated Power: 400kw/1900rpm

P00.001001

(OLO

Max. Total Rated Lifting Load: 30t Max. Load Moment of Base Boom: 989.8kN · m Dead Weight in Travel State: 27409kg Rated Power: 162/2000kW/r/min

Dead Weight in Travel State: 40215kg

1010

Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2033.5kN · m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm

Max.Total Rated Lifting Load: 460t Max.Load Moment of Base Boom: 13800kN.m Dead Weight in Travel State: 55000kg Rated Power: 482.2kw/1800rpm

6664kN.m

XCA200

XCA460

XCR30

Max. Total Rated Lifting Load: 1600t

Max. Load Moment of Base Boom: 31360kN · m Dead Weight in Travel State: 92000kg Rated Power: (482.2/1800)/(295/1800)kW/r/min

XCA230

Consolina XCA220 S

Max. Total Rated Lifting Load: 220t Max. Load Moment of Base Boom: 7393kN · m Dead Weight in Travel State: 59000kg Rated Power: 361.1/1800kW/r/min

001001-000

XCA500

Max.Total Rated Lifting Load: 230t Max.Load Moment of Base Boom: 7393kN.m Dead Weight in Travel State: 54990kg Rated Power: 400kw/1800rpm

Co.100-00-1

CO01001-000

XCA550 1 Max.Total Rated Lifting Load: 500t Max.Load Moment of Base Boom: 15000kN. Dead Weight in Travel State: 84000kg Rated Power: 480kw/1800rpm

Max.Total Rated Lifting Load: 550t Max.Load Moment of Base Boom: 16500kN.m Dead Weight in Travel State: 84000kg Rated Power: 482.2kw/1800rpm

1010

Coloron

1 400000

XCA130L7

XCA260

XCR35

XCR55L5_E

XCR70 F

XCR90 M

Max.Total Rated Lifting Load: 260t Max.Load Moment of Base Boom: 8000kN.m Dead Weight in Travel State: 54000kg Rated Power: 400kw/1900rpm

Max.Total Rated Lifting Load: 130t Max.Load Moment of Base Boom: 5145kN.m Dead Weight in Travel State: 54990kg Rated Power: 356kw/1900rpm

Max.Total Rated Lifting Load: 300t Max.Load Moment of Base Boom: 9996kN.m Dead Weight in Travel State: 55000kg Rated Power: 480kw/1800rpm Looko, o.

QAY650A Max. Total Rated Lifting Load: 650t Max. Load Moment of Base Boom: 19500kN · m Dead Weight in Travel State: 94400kg Rated Power: (482.2/1800)/(205/2200)kW/r/min

Max. Total Rated Lifting Load: 35t Max. Load Moment of Base Boom: 1396kN · m

Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN · m Dead Weight in Travel State: 41800kg Rated Power: 194/2200kW/r/min

Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN · m Dead Weight in Travel State: 44055kg Rated Power: 194/2000kW/r/min

Dead Weight in Travel State: 30657kg

1010

1010

10=01

Dead Weight in Travel State: 78000kg Rated Power: (480/1800)/(205/2200)kW/r/min

XCR35_Y

XCR55L5_Y

XCR70 Y

XCR100 U

Max. Total Rated Lifting Load: 750t

Dead Weight in Travel State: 30657kg

1010

Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 1396kN · m

Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2033.5kN.m Dead Weight in Travel State: 41600kg Rated Power: 162kw/2200rpm

XCA1200_1 Max.Total Rated Lifting Load: 1200t Max.Load Moment of Base Boom: 3

Dead Weight in Travel State: 88000kg

XCR35_S Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 1396kN · m Dead Weight in Travel State: 30657kg

XCR55L4 Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN · m

1010

XCR55L5_S
Max.Total Rated Lifting Load: 55t
Max.Load Moment of Base Boom: 2033.5kN.m
Dead Weight in Travel State: 41600kg
Rated Power: 162kw/2200rpm

Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN · m Dead Weight in Travel State: 44055kg Rated Power: 192/2000kW/r/min

XCR70 S

Max.Total Rated Lifting Load: 70t
Max.Load Moment of Base Boom: 2028.6kN · m
Dead Weight in Travel State: 44055kg
Rated Power · 102/m/2000-

XCR120

formal

Max. Total Rated Lifting Load: 120t Max. Load Moment of Base Boom: 3567kN · m Dead Weight in Travel State: 70048kg Rated Power: 221/2200kW/r/min

1010 XCR70 M

Max.Total Rated Lifting Load: 70t
Max.Load Moment of Base Boom: 2028.6kN ·
Dead Weight in Travel State: 44055kg
Rated Power: 192kw/2000mm

10=0

XCR130 U Max. Total Rated Lifting Load: 257938 lb Max. Load Moment of Base Boom: 2632 ft · lb Dead Weight in Travel State: 154428 lb Rated Power: 300/2200kW/r/min

XCR30 S

Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 989.8kN · m Dead Weight in Travel State: 27409kg Rated Power: 162kw/2000rpm

XCR30_Y Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 989.8kN · m Dead Weight in Travel State: 27649kg Rated Power: 162kw/2000rpm

XCR55L5

XCR55L4_M Max. Total Rated Lifting Load: 55t Max.Load Moment of Base Boom; 2033.5kN · m Dead Weight in Travel State: 40215kg

1010

1010 XCR70

Dead Weight in Travel State: 41600kg

Max. Total Rated Lifting Load: 55t Max. Load Moment of Base Boom: 2033.5kN · m

Max. Total Rated Lifting Load: 60ust Max. Load Moment of Base Boom: 1499832 ft.lb Dead Weight in Travel State: 92152 lb Rated Power: 260/2200kW/r/min

XCR75 U Max.Total Rated Lifting Load: 75ust
Max.Load Moment of Base Boom: 1496218 ft · lb
Dead Weight in Travel State: 154323 lb

Max. Total Rated Lifting Load: 70t Max. Load Moment of Base Boom: 2028.6kN · m Dead Weight in Travel State: 44055kg Rated Power: 192/2000kW/r/min



XCR60L5_U

XCR90

Max. Total Rated Lifting Load: 90t Max. Load Moment of Base Boom: 2840kN · m Dead Weight in Travel State: 53498kg Rated Power: 192/2000kW/r/min



XGC88000(4000t) Rated power:3 X 641kw/2100rpm

Operating weight:45000t Max total rated lifting load :4000t Max load moment of base boom:88000t.m



• CRAWLER CRANE -----

Rated power:199kw/2000rpm Operating weight:78.7t Max total rated lifting load:100t Max load moment of base boom: 360t.m

Rated power:200kw/1800rpm Operating weight:104.5t Max total rated lifting load:100t Max load moment of base boom: 575.4t.m XGC100A

Rated power:199kw/2000rpn

ing weight:78.6t Max total rated lifting load:100t

Max load moment of base boom: 420t.m





XGC150





XGC150-IA

load:150t

Rated power:200kw/18 Operating weight:132t Max total rated lifting



ent of base boom:341t.m

Operating Weight: 121.1t Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom:

XGC130- | Rated Power: 200kW/1800rpm



XGC200A



Rated power:243



XGC12000(800t)





Rated power:338kw/1900rpm Operating weight:280t Max total rated lifting load: 350t



Rated power:338kw/1900rpm Operating weight:350t Max total rated lifting load: 400t





XGC2100W

XGC25T

• TELESCOPIC CRAWLER CRANE



XGC11000(650t)

XGC25T (L5)



XGC55T

XGC16000(1250t)

Rated power:614kw/2100rpm Operating weight:850t Max total rated lifting load :1250t Max load moment of base boom:16000t.m

XGTC70 XGC80T

XGC28000(2000t)

rated power:2 x 480kw/1800rpm operating weight:1259t max total rated lifting load :2000t max load moment of base boom:28000t.m





Rated power:160kw/1800rpm Operating weight:35.2t Max total rated lifting load:35t Max load moment of base boom:129.5t.m



• MULTIPLE FUNCTIONAL CRAWLER CRANE






rated power:298kw/1800rpm operating weight:106.8t max total rated lifting load :100t max load moment of base boom:534t.m







XGA6012-6S Jib length/Tip load: 60000mm/1200kg Rated Load Moment: 1000KN • m

XGA6013-8S Jib length/Tip load: 60000mm/1300kg Rated Load Moment: 1000KN · m Max.lifting Capacity: 8000kg XGA6020-8S

Jib length/Tip load: 60000mm/1500kg Rated Load Moment: 1250KN · m Max.lifting Capacity: 8000kg

XGA6515-8S Jib length/Tip load: 65000mm/1500kg Rated Load Moment: 1250KN · m



Jib length:55000mm Tip load:2000kg XGTL1600II

Jib length/Tip load: 78000mm/6000kg Rated Load Moment:16000KN · m

Jib length/Tip load: 50000mm/1600kg Rated Load Moment: 1000KN · m Max.lifting Capacity: 8000kg

XGTL120(5016-8)

● LUFFING TOWER CRANE

Jib length:60000mm Tip load:3200kg Rated load moment: 3000KN · m

XGL1800 Jib length:60800mm Tip load:11500kg Rated load moment: 9000KN · m Max lifting Capacity: 13600kg XGTL160A(5020-10) Jib length/Tip load: 50000mm/2000kg Rated Load Moment: 1250KN · m Max.lifting Capacity: 10000kg

XGTL500(6048-25)

Jib length/Tip load: 60000mm/4800kg Rated Load Moment

XGT7022-12S

Jib length/Tip load: 70000mm/2200kg

SQZ84.2

SQZ300.3

SQZ500.8

60000mm/2500kg Rated Load Momer ent: 2500KN · m Max.lifting Capacity: 20000kg XGTL750II

Jib length/Tip load:

XL6025-20

Jib length/Tip load: 60000mm/6000kg ent: 5000KN · m Rated Load Mom Max.lifting Capacity: 50000kg

TOPLESS TOWER CRANE



XGT5610-6S1

XGT7532-20S Jib length:75000mm Tip load:3200kg Rated load moment: 3150KN · m XGT6013-6S1 Jib length:60000mm Tip load:1300kg Rated load moment:

XGT8072-50S Jib length/Tip load: 80000mm/7200kg Rated Load Moment: 9000KN · m Max.lifting Capacity: 50000kg XGT6015-cc Jib length/Tip load: 60000mm/1500kg

XGT8075-40S Jib length/Tip load: 80000mm/7500kg Rated Load Moment: 9000KN · m

XGT6515-10S Jib length:65000mm Tip load:1500kg Rated load moment:

XGT600-25S

Jib length:80000mm Tip load:4200kg Rated load moment: 6000KN · m

XGT6515B-10S Jib length:65000mm Tip load:1500kg

XGT1200-64S Jib length:8000mm Tip load:13000kg Rated load moment: 12000KN · m Max lifting Capacity: 640000kg

SQZ68.2

SQZ200.4

SQZ460.6

SQZ860.8

SQS68-4

SQS157-5

Max. lifting moment: 6.72t · m Max. lifting capacity: 3200kg Max. hydraulic outreach: 7..3m

Max. lifting capacity: 10000kg Max. hydraulic outreach: 12.75r

Max. lifting moment: 45t · m Max. lifting capacity: 22500kg

Max. hydraulic outreach: 16.8m

Max. lifting moment: 74t · m Max. lifting capacity: 43000kg Max. hydraulic outreach: 20.13m

XGT2230 Jib length:80000mm Tip load:22500kg Rated load moment: 22300KN · m

Max. lifting moment: 8.4t · m Max. lifting capacity: 4000kg Max. hydraulic outreach: 7.3m


Max. lifting moment: 30t · m Max. lifting capacity: 12000kg Max. hydraulic outreach: 9.78m

Max. lifting moment: 44t · m Max. lifting capacity: 16000kg

Max. hydraulic outreach: 21.12m

XGT7527-18S Jib length/Tip load: 75000mm/2700kg Rated Load Moment: 3150KN Max.lifting Capacity: 18000kg

CONSTRUCTION HOIST



• KNUCKLE BOOM LORRY CRANE SQZ20.2 SQZ32.1

• LORRY CRANE



Max. lifting moment: 3.2t · m Max. lifting capacity: 2000kg Max. hydraulic outreach: 4.78m SQZ132.4 SQZ160.4 Max. lifting moment: 13.2t · m Max. lifting capacity: 6300kg Max. hydraulic outreach: 12.2m Max. lifting moment: 16.8t · m Max. lifting capacity: 8000kg Max. hydraulic outreach: 12.75m

SQZ350.4 Max. lifting moment: 35t · m Max. lifting capacity: 14000kg Max. hydraulic outreach: 11.4m

SQZ600.8 Max. lifting moment: 61.2t · m Max. lifting capacity: 30000kg Max. hydraulic outreach: 20.67m

50542-3

SQS125-5

SQS200-5

SQS350-5

Max. lifting moment: 35t · m Max. lifting capacity: 14000kg Max. hydraulic outreach: 21m

Max. lifting moment:40t · m Max. lifting capacity: 16000kg Max. hydraulic outreach: 11.81m SQZ760.8

SQZ400.4

Max. lifting moment: 66.3t · m Max. lifting capacity: 38000kg Max. hydraulic outreach: 20.55m

• TELESCOPING BOOM LORRY CRANE 50568-3

Max. lifting moment: 6.8t · m Max. lifting capacity: 3200kg Max. hydraulic outreach: 7.56m Max. lifting moment: 4.2t · m Max. lifting capacity: 2100kg Max. hydraulic outreach: 7.73m SQS125-6

Max. lifting moment: 12.5t · m Max. lifting moment: 12.5t · m Max. lifting capacity: 5000kg Max. hydraulic outreach: 15.5m Max. lifting capacity: 5000kg Max. hydraulic outreach: 18.5m SQS250-4

Max. lifting moment: 26t · m Max. lifting capacity: 11000kg Max. hydraulic outreach: 15.5m Max. lifting moment: 20t · m Max. lifting capacity: 8000kg Max. hydraulic outreach: 15.1m SQS400-5 Max. lifting moment: 45t · m Max. lifting capacity: 16000kg Max. hydraulic outreach: 20.5m

Max. lifting moment: 25t · m Max. lifting capacity: 10000kg Max. hydraulic outreach: 15.8m

SQS450-5 Max. lifting moment: 47t · m Max. lifting capacity: 18000kg Max. hydraulic outreach: 21.8i

伊豆

Operating weight: 3660 Bucket capacity: 1.6m³ Rated power: 190.5/2000kw/rpm

XE65DA Operating weight: 6150kg Bucket capacity: 0.25m³

Bucket capacity: 1.3m

Rated power: 150/2050kw/rpm

Operating weight: 48100–49500kg Bucket capacity: 2.5m³ Rated power:

Operating weight: 21000-23000kg Bucket capacity: 1.05m³

XE490DK

XE220E

XE245DK

XE370CA

SQS100-3 Max. lifting moment: 6.8t · m Max. lifting capacity: 3200kg Max. hydraulic outreach: 10m Max. lifting moment: 10t · m
Max. lifting capacity: 4000kg
Max. hydraulic outreach: 7.93m

SQS157-6 Max. lifting moment: 15.7t · m Max. lifting capacity: 6300kg Max. hydraulic outreach: 19.6m Max. lifting capacity: 6300kg Max. hydraulic outreach: 15.5m

SQS300-4 Max. lifting moment: 33t · m Max. lifting capacity: 13000kg Max. hydraulic outreach: 17m

XE215CLL

XE75DA

XE270DK

Rated power: 150/2050kw/rpm

XE15E(Euro V)

Operating weight: 1795 Bucket capacity: 0.04m³ Rated power:

XE260E Operating weight: 25870kg Bucket capacity: 1.2m³ Rated power: 142/2000kw/rpm

XE150U(Tier 4F)/XE150E(Euro IV)

Operating weight: 14800kg Bucket capacity: 0.61m³ Rated power:

Bucket capacity: 1.4m3

Operating weight: 22350kg Bucket capacity: 0.4m³ Rated power: 128.5/2100kw/rpm

perating weight: 7460kg ucket capacity: 0.33m³

SQS500-5 Max. lifting moment: 52t · m Max. lifting capacity: 20000kg Max. hydraulic outreach: 23.6m

SQZ105.4

SQZ330.6

SQZ600.6

Max. lifting moment: 10.5t · m Max. lifting capacity: 5000kg Max. hydraulic outreach: 12.2m

Max. lifting moment: 33t · m Max. lifting capacity: 16500kg Max. hydraulic outreach: 16.3m

Max. lifting moment: 55t · m Max. lifting capacity: 30000kg Max. hydraulic outreach: 16.4m

505100-4 Max. lifting moment: 10t · m Max. lifting capacity: 4000kg Max. hydraulic outreach: 11m

Max. lifting moment: 21t · m Max. lifting capacity: 9000kg Max. hydraulic outreach: 15m SQS300-6

SQS200-4

Max. lifting moment: 30t · m Max. lifting capacity: 12000kg Max. hydraulic outreach: 20m

SQS625-7

XE260CLL

XE80DA

XE305D

11.8/2300kw/rpm

XE300E

XE18E

Operating weight: 2756 Bucket capacity: 0.4m³ Rated power: 128.5/2100kw/rpm

Operating weight: 7730kg Bucket capacity: 0.33m³

Operating weight: 30500kg

Bucket capacity: 1.4m Rated power: 169/2050kw/rpm

Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power:

Operating weight: 32700kg Bucket capacity: 1.4m³

_ iaht: 27500kg

Max. lifting moment: 64t · m Max. lifting capacity: 25000kg Max. hydraulic outreach: 29.4

XE235C

CRAWLER EXCAVATOR

XE215C

XE17U

EARTHMOVING MACHINERY

Operating weight: 21500kg Bucket capacity: 1.0m³ Rated power: 128.5/2100kw/rpm

Departing weight: 1795kg Sucket capacity: 0.04m³

XE155D/XE155DK

Bucket capacity: 0.61m3

93/2200kw/rpm

XE370D

Operating weight: 36800kg Bucket capacity: 1.7m³ Rated power:

XE35E Operating weight: 4200kg Bucket capacity: 0.12m³ Rated power: 18.2/2200kw/rpm

Operating weight: 1795kg Bucket capacity: 0.04m³ Rated power:

650x650x1508mm





XE135D Operating weight: 13200kg









213/2000kw/rnm



XE18U

XE210U



11.8/2300kw/rpm

Operating weight: 2570 Bucket capacity: 1.2m³



Operating weight: 23500kg Bucket capacity: 1.0m³ Rated power: 128.5/2100kw/rpm

XE35U(Stage 3A) Operating weight: 4200kg Bucket capacity: 0.12m³



XE200DA g weight: 21200kg Bucket capacity: 0.93m



XE380DK Operating weight: 38200kg Bucket capacity: 1.9m³ Rated power:



XE55E Operating weight: 5700kg Bucket capacity: 0.16m³



XE27U Operating weight: 2780kg Bucket capacity: 0.06m³ Rated power: 15.6/2400kw/rpm



Operating weight: 32700 Bucket capacity: 1.4m³ Rated power:

XE265C

Operating weight: 25500kg Bucket capacity: 1.2m³ Rated power: 135.5/2150kw/rpm



Control of the contro



XE400DK



XE150E



Operating weight: 4200kg Bucket capacity: 0.12m³ Rated power: 18.2/2200kw/rpm

P

XE360U(Tier 4F)

Operating weight: 3680 Bucket capacity: 1.6m³ Rated power: 213/2000kw/rpm

BBucket Load:1m³ Rated Load:1400kg Rated Power:60kW

Max.Breakout:44kN

6100 x 2060 x 3010 mm

XC958

Operating Weight:5000kg

Overall Dimension(LxWxH):

XC958
Bucket Load:3.1m³
Rated Load:5500kg
Rated Power:168kW
Operating Weight:19300kg
Max. Breakout:180kN
Ovreall Dimension(LxWxH):
8600x2996x3435mm

N Da

LW180FV

XE35U(Tier 4F)/XE35E(Euro V)





XE60DA

Bucket capacity: 1.14m³ Rated power: 140/2000kw/rpm



250/2000kw/rnm



31.2/2200kw/rpm

XE60WD

Operating weight: 5900kg Bucket capacity: 0.23m³ Rated power:

LW180K(V)

XC968
Bucket Load:3.5m³
Rated Load:6000kg
Rated Power:175kW
Operating Weight:20600kg
Max. Breakout:205kN
Ovreall Dimension(LxWxH):
8405x3220x3435mm

A La

XC968

Rated Load:1100kg Rated Power:58.8/60kW

Operating Weight:6200kg Max.Breakout:55kN

Overall Dimension(LxWxH): 6030 x 2060 x 2950mm

XE75U(Tier 4F) XE55U(Tier 4F)/XE55E(Euro V) Operating weight: 7460kg Bucket capacity: 0.3m³ Rated power: Operating weight: 5700kg Bucket capacity: 0.16m³ Rated power:





Bucket Load:1.2m3

Rated Load:1700kg Rated Power:65kW

A COLOR

XC978

Operating Weight:6400kg Max.Breakout:58kN

Overall Dimension(LxWxH): 6800 x 2170 x 3110mm

XC978
Bucket Load:4.2m³
Rated Load:7000kg
Rated Power:231kW
Operating Weight:23500kg
Max. Breakout:210kN
Ovreall Dimension(LxWxH):
8893x3300x3607mm

LW200FV



LW200K(V)

Rated Load:2000kg

Rated Power:66.2kW

Max.Breakout:60kN

6365 x 2060 x 2950mm

XC998
Bucket Load:5.4m³
Rated Load:9000kg
Rated Power:261kW
Operating Weight:30500kg
Max. Breakout:260kN
Ovreall Dimension(LxWxH):
9400x3430x3730mm

XC998

Operating Weight:6300kg

Overall Dimension(LxWxH):



Operating weight: 20500kg Bucket capacity: 0.86m³ Rated power:

XE210WB

LW330FN

Bucket Load:2.1m3

Rated Load:3300kg Rated Power:92kW

LW550FN

Bucket Load:3.0m Rated Load:5300kg Rated Power:162kW Operating Weight:17100kg Max.Breakout:170kN

Operating Weight:10800kg Max.Breakout:120kN

Overall Dimension(LxWxH):









Bucket Load:18.0m3 Max. Breakout:961kN



LW350KN Bucket Load:2.0m³ Rated Load:3500kg Rated Power:105kW Operating Weight:11200kg Max.Breakout:124kN Overall Dimension(LxWxH): 7300 x 2580 x 3290 mm

ZL50GN



LW600KN

cket Load:3.5m

Rated Power:175/178kW Operating Weight:20200kg Max.Breakout:205kN

Overall Dimension(LxWxH): 8505 x 3220 x 3515mm

Rated Load:6000kg

Ovreall Dimension(LxWxH):

Bucket Load:2.4m³
Rated Load:4000kg
Rated Power:129kW
Operating Weight:14000kg
Max.Breakout:150kN
Overall Dimension(LxWxH):
7800 x 2718 x 3480mm

LW700HV t Load:4.2m Rated Load:7000kg Rated Power:210kW Operating Weight:23500kg Max.Breakout:210kN

LW330KN

Rated Load:3000kg Rated Power:92kW

Operating Weight:11220kg Ovreall Dimension(LxWxH): 7455x2482x3320mm

830mm

ng Diameter

Overall Dimension(LxWxH): 8900 x 3200 x 3620mm

ion(LxWxH):



Operating Weight:25500kg Max.Breakout:240kN sion(LxWxH):

LW800KN

LW600KN

Rated Load:6000kg

Rated Load:000kg Rated Power:178kW Operating Weight:20880kg Ovreall Dimension(LxWxH): 8805x2860x3515mm

Rated Load:8000kg Rated Load.5000kg
Rated Power:261kW
Operating Weight:28500kg
Max.Breakout:250kN Overall Dimension(Lx 9400 x 3430 x 3770mn ion(LxWxH):

Overall Dimension(Lx 9400 x 3430 x 3770mm

LW900KN Rated Load:9000kg Rated Power:261kW Operating Weight:30500kg Max.Breakout:260kN

ion(LxWxH):



Min. Clamping Diameter 1000mm Rated Load:8000kg

Rated Load:8000kg
Rated Power:261kW
Operating Weight:28500kg
Ovreall Dimension(LxWxH):
10000x3210x3785mm

LW800KNJ



XC360

Shovel Capacity:178kW Operating Weight:19700 Max.tractio:171kN

Overall Dimension(Lx 7840 x 3220 x 3550mm

60A

Rated Load:1600kg Rated Power:66.2kW Operating Weight:6700kg Ovreall Dimension(LxWxH): 6415x1960x2950mm

LW600KV-LNG LWGOOKV - LNG Bucket Load:3.5m² Rated Load:6000kg Rated Power:191kW Operating Weight:21500kg Max. Breakout:205kN Ovreall Dimension(LxWxH): 8780x3220x3515mm Bucket Load:3m³
Rated Load:5000kg
Rated Power:162kW
Operating Weight:17500kg
Max. Breakout:170kN
Ovreall Dimension(LxWxH):
8322x2996x3515mm

n(LxWxH):

ZL20E
Bucket Load:1.0m³
Rated Load:2000kg
Rated Power:66.2kW
Operating Weight:6300kg
Max. Breakout:55kN
Ovreall Dimension(LxWxH):
5950x1960x2550mm

ZL20E

XC770K

Bucket Load:0.6m3

Rated Load:1250kg Rated Power:74.9kW Operating Weight:3700kg Ovreall Dimension(LxWxH): 3750x2000x1960mm



Operating Weight:14000kg Max.Breakout:150kN Overall Dimension(LxWxH): 7800 x 2718 x 3480mm

TY160

LW440FN

Bucket Load:2.4m³

Rated Load:4000kg Rated Power:129kW

ZL50E ZL50E
Bucket Load:2.5m³
Rated Load:5000kg
Rated Power:162kW
Operating Weight:18500kg
Max. Breakout:170kN
Ovreall Dimension(LxWxH):
8190x3000x2875mm

LOADER

Min. Clamping Diameter 1000mm Rated Load:7000kg

Rated Load:7000kg
Rated Power:226kW
Operating Weight:23800kg
Ovreall Dimension(LxWxH):
9233x3200x3620mm

LW700KVJ

ZL50GN Bucket Load:2.5m³ Rated Load:4500kg Rated Power:162kW Operating Weight:19200kg Max.Breakout:150kN Overall Dimension(LxWxH): 8515 x 3028 x 3515mm



18000(at 1400mm height)kg Rated Load:21900kg Rated Power:162kW Attachment Dimension((LxWxH): 1840x1540x1260mm Max.Dump angle:35 Ovreall Dimension(LxWxH): 8260x2945x3515mm



Rated Load:2500kg Rated Power:70/72/74/74.9/82kW Operating Weight:8200kg

XC750K Bucket Load:0.45m³ Bucket Load:0.6m³ Bucket Load:0.45m3 Rated Load:750kg Rated Power:36.8/35.5kW











XC6-4517K

Max.Lift Capacity:4500k Lifting Height:16700mm Rated Load:82/74.9kW Operating Weight:1350 Max.Traction(withoutu ≥70/73kN

Overall Dimension(LxWxH): 6960 x 2500 x 2850mm Fork Length:1200mm

. hv-4500kd





LW550FN





STEEL MILE LOADER

WZ30-25 Bucket Load:2.5m3 Bucket Load:1m3 Rated Load:5000kg Rated Power:162kW Operating Weight:17500kg Max.Breakout:170kN Overall Dimension(LxWxH): 8290 x 3000 x 3515mm



ions(L × W × H)





хс870НК









Bucket Load: 1m3

Rated Load: 1300kg Rated Power: 60/73kW Operating Weight: 4900kg Max.Breakout: 44kN Overall Dimension(LxWxH): 6150 x 2060 x 2930 mm

LW160FV









ZL50GN

TY320 nated Power: 235kW 315HP 2,000 Operating Weight: 38,800kg 85,538lb Blade Width × Height 8,916mm × 4,130mm × 3,602m 29'3" × 13'7" × 11'10" (with straight tilt blade and three–shank ripper and ROPS)














LW200KVJ















TY230

LE





4,314mm × 1,841mm 14'2" × 6'1" Dimensions(L × W ons(L x W x H)

WHEEL BULLDOZER





Shovedl Capacity:3.9m³
Rated Power:162kW
Operating Weight:16300kg
Ovreall Dimension(LxWxH):
7430x3354x3515mm





Shovedl Capacity:10.0m³
Rated Power:418kW
Operating Weight:47000kg
Max.Breakout:158kN
Ovreall Dimension(LxWxH):
10333x5200x4315mm

MINING MACHINERY

MINING EXCAVATOR



XE7000 Operation Weight: 672000kg Bucket Capacity: 30~36m3 **Output Power:**

XE3000

XDE200

Body Capacity:

Operation Weight: 285000kg Bucket Capacity: 15~17m³ Output Power: 1193/1800kw/rpm



ucket Capacity: 30~36m



XE950D Operation Weight: 93000kg Bucket Capacity: 4.6~7.0m³



XE950DA

447.5/2100kw/rpm

Operation Weight:91000kg Bucket Capacity:4.6-7.0m³

XE4000E

XDE320

Operation Weight:386000kg Bucket Capacity:21–23m³ Output power: 1200–1786(60HZ)/1200–1486(50HZ)kw/rpm

XE700DF Weight: 69000k Operation Weight: 69000kg Bucket Capacity: 2.4–4.6m Output Power:



Output power:

447/2000kw/rpm



XE950G Operation Weight:91000kg Bucket Capacity:4.6-7.0m³

XDR70

XDE400

Rated Power: 2800kW Rated Payload: 360000kg



icket Capacity:2.4-4.6m



Bucket Capacity: 5.2~8.5m

Operation Weight:116000kg Bucket Capacity:5.2-8.5m³ Output power



567/1800kw/rpm

XDR80T

r:353kv

XDA40

Rated Power: 350kW Rated Payload: 39000kg

Weight: 75000k Bucket Capacity: 3.8-5.3m³ Output Power:

XE1250G

XE2000 Operation Weight: 192000kg

810/1800kw/rpm

Bucket Capacity: 8~12m

0 00

rated power:588kw Rated load:91000kg

XDR100T

Operation Weight:75000kg Bucket Capacity:3.8-5.3m³ Output power:

XE750G

peration Weight: 89600kg ucket Capacity: 3.5-6.0m³ utput Power

XE900D

XE2000E



410/1480kw/rpm

XDE100S

THE STATE OF

rated power:390kw Rated load: 41000kg

Body capacity:20.5m

XDA45U

city: 100m³

ated Power: 70Kw 1301HP 2100rpm



XF2800F Operation Weight: 290000kg Bucket Capacity: 12~17m² Output Power: 1200/1490kw/rpm



XDE130 Rated Power: 970kW Rated Payload: 120000kg **Body Capacity:**



NXG5470DTS



NXG5550DTS

Rated Power: 1510kW Rated Payload: 180000kg

NXG5650DTS

rated power:2014kw Rated load: 300000kg Body capacity: 171m³ **OFF-HIGHWAY DUMP TRUCK**

NXG5470D3T

NXG5650DT

NXG5760DT

XG105

ROAD BUILDING MACHINERY

XS123

Engine:Cummins Rated Power:

Working Width:2130mm Size: 5940 x 2300 x 3150

XS163H Engine: ShangChai Rated Power: 100kw stagell Operating Weight: 16000kg Working Width:2130mm Size: 6150 x 2300 x 3200

93kw stagell Operating Weight: 12000kg



3Y153J Engine manufacturer: ShangChai Rated Power: 86kw stagell Operating weight: 12000~15000 kg Working width: 2120 mm Overall dimensions (mm) : 6224 × 2120 × 3297



Engine:ShangChai Rated Power: 92kw stageIII Operating Weight: 19000~22000kg Working Width:2420mm Size: 6285 × 2420 × 3348



XS123(Australia)

Engine:Cummins Rated Power:

XS163J Engine: ShangChai Rated Power: 103kw stagell Operating Weight: 16000kg Working Width:2130mm Size: 6150 x 2300 x 3200

XS225 Engine:ShangChai Rated Power: 140kw, stageIII Operating Weight: 22000kg Working Width:2130mm Size: 6990x2430x3200

104kw stagelll

XS163J

XS225

Rated Power: 92kw stageIII Operating Weight: 23000~26000kg Working Width:2420mm Size: 6285 × 2420 × 3348



CV83U

100kw stagell Operating Weight: 12000kg Working Width:2130mm Size: 6150 x 2300 x 3200 CV163U XS185S Engine:Cummins Rated Power: 142kw, stageIII Operating Weight: 180 Working Width:2130mr Size: 6990x2330x3200



Engine:ShangChai Rated Power: XS123H

XS225JS Engine: ShangChai Rated Power: 140kw stagelll Operating Weight: 22000kg Working Width:2130mm Size: 7000×2430×3200

XS225JS XS223JE

XS223JE Engine: ShangChai Rated Power: 136kw stagell Operating Weight: 2200 Working Width:2130mm Size: 6220 x 2300 x 3200

Rogine: ShangChai Rated Power: 140kw stagelll Operating Weight: 1800 Working Width:2130mm Size: 6760 x 2330 x 3200

I.

XP263/XP263S

Engine:ShangCha Rated Power:

132kw, stagelll Operating Weight: 26300kg Working Width:2360mm Size: 4925X2530X3450

XS183

- To

XS103H

Engine:Snans Rated Power: 100kw stagell

XS133(CE)

perating Weight: 10600kg 6150 × 2300 × 3200

Operating Weight: 13000kg Working Width:2130mm Size: 5940 x 2300 x 3150

XS265S Rated Power:
142kw, stagelll
Operating Weight: 26000kg
Working Width:2170mm
Size: 6990x2470x3260

x5183J Engine: ShangChai Rated Power: 118kw stageIII Operating Weight: 18000 Working Width:2130mm Size: 6220 x 2300 x 3200 XS265

XS143 Engine:Cummins Rated Power: 125kw stagell Operating Weight: 14000 Working Width:2130mm Size: 6200 x 2300 x 3200

XS183J

XS265 Engine:ShangChai Rated Power: 162kw, stagelll Operating Weight: 2600 Working Width:2170mm Size: 6990x2470x3260

angChai

Operating Weight: 263 Working Width:2750mn Size: 4925X2851X3450

stagelll ng Weight: 26300kg

Engine:ShangChai Rated Power:

140kw stagelll Operating Weight: 26000kg Working Width:2170mm Size: 7000 x 2470 x 3260

_<u>.</u>

Engine:ShangChai Rated Power:

Operating Weight: 26300kg Working Width:2360mm Size: 5100x2500x3200

XP265S

XS335

40

XP303/XP303S

132kw, stagelll Operating Weight: 30300kg Working Width:2360mm Size: 4925X2530X3400

Engine:ShangCh Rated Power:

XD133S

XD120





XS365 Engine:ShangChai Rated Power: Size: 7592 x 2900 x 3478



1

XP305S

XD143S

Engine:ShangChai Rated Power: 276kw, stageIII Operating Weight: 39500kg Working Width:2400mm Size: 7592 x 3040 x 3478



stagelll ting Weight: 10000kg



Engine:ShangChai Rated Power: 86kw, stagell Operating Weight: 1600 Working Width:2055mm Size: 4800 x 2356 x 3330

Engine:Snan Rated Powe 86kw, stag Operating 1 **DOUBLE DRUM VIBRATORY ROLLER**

XP203

:ShangCha

XD103

XMR153S

Engine:Perkins Rated Power:

17.3kw, stagelll

XD123

XD123S

XP263K

Engine:Shar Rated Powe

XD133



XD120VT (CE)

Engine:KUBOTA Rated Power: 25kw, stageV(CE)

Operating Weight: 2650kg Working Width:1200mm Size: 2610 x 1286 x 2575

Engine:ShangChai Rated Power: 132kw, stagelll Operating Weight: 3030 Working Width:2750mm Size: 4925X2851X3400

1

XP303K



XMR303 Engine:ChangChai Rated Power:

28.5kw, stageIII Operating Weight: 3000kg Working Width:1200mm Size: 2682 x 1382 x 2682



Operating Weight: 500kg

XMR053

Engine:Kohler Rated Power:

10.5kw, stagell

Engine:ChangChai Rated Power: 28.5kw, stagelll Operating Weight: 3500kg Working Width:1200mm Size: 2682 x 1328 x 2752

XH283J

10 - 00

Rated Power: 178kW 239hp 2000rpm

3965 x 610mm Size: 8970 x 2625 x 3420mm

10 - TO

Rated Power: 194kW 240hp 2200rpm

Operating Weight:19500kg Moldboard Width × Chord Hight:

Size:9448 x 2625 x 3472mm

GR2605AT3

3965 × 610mm

GR2403

Operating Weight: 1600kg Operating Weight: 800kg Working Width:900mm Size: 2118 x 976 x 2278

> XMR403 Engine:ChangChai Rated Power:

XMR203 Engine:ChangChai Rated Power: 17.6kw, stageIII Operating Weight: 2000I Working Width:1000mm Size: 2370 x 1090 x 2210 **3**

XMR203

XMR403S(America) Rated Power: 33.6kw, stageIV/TIER4F Operating Weight: Working Width: Size: 2720 x 1428 x 2819

Engine:KUBOTA
Rated Power:
24.6kw, stageV(CE)
Operating Weight: 2650kg
Working Width:1000mm
Size: 2610 x 1086 x 2575 **5**

XD100 (CE)

XMR403VT Engine:ChangChai Rated Power:

10 - TOO

Rated Power: 132kW 176hp 2200rpm

3660 x 610mm Size:8900 x 2625 x 3420mm

Operating Weight:15000kg Moldboard Width × Chord Hight:

10 - TOO

GR1805T3

GR165

XD120 (CE) Rogine:KUBOTA
Rated Power:
24.6kw, stageV(CE)
Operating Weight: 2700kg
Working Width:1200mm
Size: 2565 x 1286 x 2575

7 XMR403SVT(America) Engine:Perkins Rated Power: 36.4kw,stageIV/TIER4F Operating Weight: 3880kg Working Width:1300mm Size: 2720 x 1462 x 2706

Engine:KUBOTA
Rated Power:
24.6kw, stageIII
Operating Weight: 2850kg
Working Width:1200mm
Size: 2610 x 1286 x 2575 **5** XMR603

55.4kw, stagelll Operating Weight: 6000kg

Engine:Deutz Rated Power:

10 - TO

140kW 197hp 2000rpm

Operating Weight:15400kg Moldboard Width x Chord Hight:

3660 x 610mm Size:8900 x 2625 x 3420mm

10 - TO

GR2403A

GR1803

GARBAGE COMPRESSION TRUCK



10 - TO

Rated Power: 160kW 215hp 2200rpm

3965 x 610mm Size:8900 x 2625 x 3420mm

Operating Weight:16500kg Moldboard Width × Chord Hight:

XH233J

• MOTOR GRADER



10 - 00

Rated Power: 140kW 186hp 2000rpm

3965 x 610mm Size:8900 x 2625 x 3420mm

Operating Weight:15400kg Moldboard Width × Chord Hight:

GR2153

GR2205T3

4270 × 610mm

Rated Power: 164kW 200hp 2200rpm

Operating Weight:16500kg Moldboard Width × Chord Hight:

Size:9343 × 2625 × 3432mm



Size:16500x4350x4729mm

10 - TO

GR215A/GR2153A

Rated Power: 164kW 220hp 2000rpm

4270 × 610mm Size:9180 × 2625 × 3420mm

10 - Too

Rated Power: 178kW 220hp 2200rpm

Operating Weight:17000kg Moldboard Width × Chord Hight:

Size:9343 x 2625 x 3432mm

GR2405T3

3965 x 610mm

Operating Weight:16100kg Moldboard Width × Chord Hight:



10 - 00 GR2405T3 Rated Power: 178kW 240hp 2200rpm Operating Weight: 17000kg Moldboard Width x Chord Hight:

3965 x 610mm Size:9343x2625x3432mm

10 - TO

Rated Power: 140kW 186hp 2200rpm

Operating Weight:15400kg Moldboard Width × Chord Hight:

Size:8866 x 2695 x 3385mm

GR1805

3965 x 610mm

Rated Power: 178kW 239hp 2000rpm Operating Weight:17000kg
Moldboard Width x Chord Hight:
Moldboard Width x Chord Hight:
Moldboard Width x Chord Hight: 3965 x 610mm Size:8970 x 2625 x 3420mm

Rated Power: 140kW 170hp 2200rpm Operating Weight:16000kg Moldboard Width × Chord Hight: 3965 × 610mm Size:9331 × 2625 × 3330mm 10 - Too

GR3005T3 Rated Power: 242kW 320hp 2100rpm Operating Weight:28500kg Operating Weight:14500kg Operating Weight:19000kg Moldboard Width x Chord Hight: Moldboard Width x Chord Hight: Moldboard Width x Chord Hight: 4572 x 686mm

Size:10923 x 3270 x 3850mm

Rated Power: 261kW 350hp 2100rpm Operating Weight:38000kg Moldboard Width × Chord Hight: 4877 × 787mm Size:12600 × 3490 × 4100mm 0 - 00

Rated Power: 125kW 150hp 2200rpm

Size:8711 x 2483 x 3385mm

10 - TO

142kW 190hp 2200rpm

3660 x 610mm Size:8900 x 2625 x 3420mm

10 - TO

GR3505T3

GR1605

3660 × 610mm

Operating Weight:15400kg Moldboard Width × Chord Hight:

GR180

Rated Power: 178kW 240hp 2000rpm Operating Weight:16500kg Moldboard Width × Chord Hight: 3965 × 610mm Size:9180 × 2625 × 3420mm



Topo

Rated Power: 261kW 350hp 2100rpm

Operating Weight:32000kg Moldboard Width × Chord Hight:

Size:11375 x 3400 x 4100mm

GR3505T5



J. RP903 Paving Range:3.0 ~ 9.15m Transport Weight:28000kg



RP953

W.

Size:6260 x 1900 x 3750 Topo

Engine:ShangChai 162kw stage |||
Paving Range:2.5 ~ 10.5m

Transport Weight:31500kg



RP953T

Size:5820 x 2000 x 3690

Engine:ShangChai 213kw stage |||
Paving Range:2.5 ~ 12m
Transport Weight:34.6t



Total

To the RP1253T Paving Range:3.0 ~ 12.5m Transport Weight:35800kg



3965 x 610mm Size:9448 x 2625 x 3472mm

Engine:Cummins 129kw st Paving Range:2.5 ~ 7.25m Transport Weight:19000kg maximum laydown rate:60 Size:6680 v 2500 v 4000

Topo . RP1655T Engine:WeiChai 316kw s Paving Range:3 ~ 16.5m Transport Weight:46t




Engine:ShangChai 103kw stage |||
Paving Range:2.5 ~ 6m
Transport Weight:16500kg
maximum laydown rate:400t/h













XE4000

XDE240

Body Capacity:

() III ()

Rated Power: 1864kW Rated Payload: 230000kg

Operation Weight: 390000kg Bucket Capacity: 20~22m³ Output Power: 1491/1800kw/rpm









MINING TRUCKS

er:567kv

rated power:567kw Rated load: 65000kg









XS115



To the second

XS113(stageII/III)

Rated Power: 93kw stagell/104kw stagelll Operating Weight: 10800kg Working Width:2130mm Size: 5940 x 2300 x 3150

XS143H Engine:ShangChai Rated Power: 100kw stagell Operating Weight: 14000 Working Width:2130mm Size: 6150 x 2300 x 3200

A32U3S Engine:Cummins Rated Power: 142kw, stageIII Operating Weight: 20000kg Working Width:2130mm Size: 6990x2390x3200

XS265JS

XS205S



J.

XS113E

93kw stagell Operating Weight: 10400kg Working Width:2130mm Size: 5940 × 2300 × 3150

XS143J Engine:ShangChai Rated Power: 103kw stagell Operating Weight: 14000 Working Width:2130mm Size: 6150×2300×3200

XS203 Engine: ShangChai Rated Power: 100kw, stageIII Operating Weight: 20000kg Working Width:2130mm Size: 6760 x 2330 x 3200

STATIC THREE-DRUM ROLLER

















 LIGHT COMPACTION EQUIPMENT XMR083 Engine:ChangChai Rated Power:

> XMR403S

5kw, stagell

THE PARTY

Working Width:708mm Size: 2695 x 760 x 1200







3660 x 610mm Size:8015 x 2380 x 3050mm













Topo .

3660 × 610mm





XM220KII

XM220KII
Rated Power:571kW 428hp
Operating Weight:33000kg
Max.Milling Width:2200mm
Max.Milling Depth:280mm
Machine:14500 x 2950 x 3100mm



XM1003K Rated Power:162kW 217hp 2200rpm Operating Weight:16800kg Max.Milling Width:1000mm Max.Milling Depth:300mm



Machine:7300 x 1085 x 980mm



XLZ2303K

Rated Power:164kW 218hp Operating Weight:13900kg Max.Milling Width:1000mm Max.Milling Depth:120mm Machine:4800 x 2295 x 2650mn

XLZ2303K Rated Power:515kW 735hp Operating Weight:33500kg Max.Milling Width:2300mm Max.Milling Depth:300mm Size:9340 x 3218 x 3197mm



XLZ2305K

Rated Power:162kW 217hp Operating Weight:14000kg Max.Milling Width:1000mm Max.Milling Depth:200mm

Machine:9580 x 2300 x 2720mr

XLZ2305K Rated Power:571kW 761hp Operating Weight:33500kg Max.Milling Width:2300mm Max.Milling Depth:300mm Size:9340 x 3218 x 3197mm



XM1005F (tire) Rated Power:184kW 245hp Operating Weight:16000kg Max.Milling Width:1000mm Max.Milling Depth:200mm

XM405



1 93

XM405S



XM1005F (crawler) Rated Power:184kW 245hp Operating Weight:16500kg Max.Milling Width:1000mm Max.Milling Depth:201mm

• TRUCK-MOUNTED INTELLIGENT ASPHALT DISTRIBUTOR



23

XM1205F Rated Power:192kW 261hp 2200rpm Operating Weight:20500kg Max.Milling Width:1200mm

Max.Milling Depth:200mm

Machine:9950 x 2180 x 3000



XM503KL XM503KL Rated Power:92kW 122hp Operating Weight:6500kg Max.Milling Width:500mm Max.Milling Depth:180mm Machine:3320 x 1828 x 2300



XM503K Rated Power:103kW 137hp Operating Weight:7950kg Max.Milling Width:500mm Max.Milling Depth:210mm Machine:6276 x 1828 x 2600

1 23

Max.Milling Depth:200mm

XM1303K



XM1305F Rated Power:177kW 237hp 2200rpm Operating Weight:16900kg Max.Milling Width:1300mm Rated Power:206kW 275hp Operating Weight:22000kg Max.Milling Width:1200mm Max.Milling Depth:300mm

Machine: 12700 x 2280 x 3000



XM2005 Rated Power:410kW 567hp Operating Weight:30500kg Max.Milling Width:2000mm Max.Milling Depth:330mm Machine: 12597 x 2500 x 3000mn



Rated Power:447kW 596hp Operating Weight:30500kg Max.Milling Width:2000mm Max.Milling Depth:330mm Machine:12597 x 2500 x 3000mn



Rated Power:470kW 630hp 2100rpm Operating Weight:30500kg Max.Milling Width:2000mm Max.Milling Depth:220mm Machine:14500 x 2880 x 3000mm



XLZ2103S Rated Power:353kW 480hp 2100rpm Operating Weight:21000kg Max.Milling Width:2100mm/2300mm Max.Milling Depth:250mm Size:9232 x 3162 x 3450mm



Rated Power:447kW 599hp 2100rpm Operating Weight:31000kg Max.Milling Width:2300mm Max.Milling Depth:250mm



XLZ2303S

Rated Power:390kW 530hp 2100rpm Operating Weight:26800kg Max.Milling Width:2100mm/2300mm Max.Milling Width:2100mm Max.Milling Depth:250mm Size:9232 x 3262 x 3450n



XL2103 wer:294kW 394hp 1900rpm Operating Weight:15600kg Max.Milling Width:2100n Max.Milling Depth:300mm Size:8740 x 2765 x 3450mm



XL2503 ver:316kW 423hp 1900rpm Operating Weight:16500kg Max.Milling Width:2500n Max.Milling Depth:300mm Size:8740 x 3060 x 3450mm



Rated Power: 115kW 154HP 2600rpm Transport Weight: 7300kg Asphalt Spraying Width: 4000mm Dimensions(L x W x H):

7010 × 2100 × 2515

XLS603

Rated Power: 115kW 154HP 2600rpm Transport Weight: 9010kg Asphalt Spraying Width: 6000mm Dimensions(L × W × H): 7580 × 2325 × 2820mm



Rated Power: 206kW 276HP 2300rpm Transport Weight: Asphalt Spraying Width: 6000mm Dimensions(L × W × H): 8920 × 2500 × 3000



Rated Power: 228kW 306HP 1900rpm Transport Weight: Asphalt Spraying Width: Dimensions(L × W × H): 10330 × 2500 × 3220

TRUCK-MOUNTED **SLURRY SEAL PAVER**



Rated Power:
Superstructure:93kW 125HP 2200rpm
Carrier: 228kW 306HP 1900rpm
Transport Weight:20500kg
Paving Range(maximum):2400–4200mm
Transport Width:3–15mm
Dimensions(L x W x H):11850 x 2496 x 3490m

ROAD MAINTENANCE TRUCK



XLY053TB Rated Power: Engine: 115kW 154hp Generator:22kW Transport Weight:8250kg Dimensions(L x W x H): 6600 x 2340 x 2950mm



45kW Carrier:165kW 221hp Generator:12kW Transport Weight:13750kg Dimensions(L × W × H): 8175 × 2495 × 3440mm



Rated Power: 165kW 221hp 2300rpm Hot Bitumen Tank Capacity Total Weight:18000kg Dimensions(L × W × H) 8900 × 2500 × 3460mm



XTF1003 Rated Power: 228kW 306HP 1900rpm Transport Weight: 19500k Max. Seal Width: 4000mm Dimensions(L x W x H): 9920 x 2500 x 3790mm



Rated Power: 249kW 337HP 1900rpn Transport Weight: 2530 Spraving Width: 4000n Dimensions(L × W × H): 11980 × 2500 × 3890mn

OO THEODY XTF1403

Rated Power: 276kW 370HP 2000rpm Transport Weight: 24800kg Spraving Width: 4000mm Dimensions(L x W x H): 11980 x 2500 x 3890mm

XAP405

XRP80

Total Installed Power: 927kW 1242hp Production Capacity:400t/h Area:1804m²

Total Installed Power: 188kW 252hp Production Capacity:80t/h

0 0 m 100 M XTF1403R Rated Power 276kW 380HP 2000rpm Transport Weight: 22300kg Spraving Width:4000mm Dimensions(L×W×H) 11300×2500×3965

XC300

XC700

Total Installed Power: 164kW Production Capacity:700t/h Area:51 x 14m²

XC400

XC800 Total Installed Power: 222kW Production Capacity:800t/h Area:53 x 14㎡

Total Installed Power: 300kW Production Capacity:800t/h Area:60 x 14m²











XC600S



XC700S Total Installed Power: 247kW Production Capacity:700t/h Area:55 x 14m² Total Installed Power: 243kW Production Capacity:600t/h Area:55 x 14m²



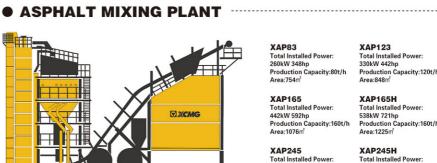

XAP325 Total Installed Power: 719kW 963hp Production Capacity:320t/h Area:1677㎡

XARP325H Total Installed r 927kW 1242hp Production Capacity:320t/h

XFP20 Total Installed Power: 6kW 8hp Production Capacity:20t/h

XAP325H Total Installed Power: 873kW 1170hp Production Capacity:320t/h Area:2501m²

XCI 300B Total Installed Fower. 240kW 321hp Production Capacity:300t/h Area:49 x 37m²

XFP30 Total Installed Power: 10kW 13hp Production Capacity:30t/h

Total Installed Power: 260kW 348hp Production Capacity:80t/h Area:754m²

XAP165 Total Installed Power: 442kW 592hp Production Capacity:160t/h Area:1076m²

XAP245H Total Installed Power: 760kW 1018hp Production Capacity:240t/h Area:2100m² XAP245 Total Installed Power: 640kW 858hp Production Capacity:240t/h Area:1634mi **XAP405H** XARP245H

Total Installed Power: 1096kW 1469hp Production Capacity:400t/h Area:2624m² Total Installed Power: 284kW 381hp Production Capacity:240t/h Area:2068m² YRP130 XRP163 talled Power Total Installed Power: 284kW 381hp Production Capacity:160t/h Total Installed Fower. 252kW 338hp Production Capacity:130t/h

XAP123

XAP165H

Total Installed Power: 330kW 442hp Production Capacity:120t/h Area:848m²

Total Installed Power: 538kW 721hp Production Capacity:160t/h Area:1225m²

SANITARY ENGINEERING EQUIPMENT

• COMPLETE SET OF GARBAGE COLLECTION AND TRANSFER EQUIPMENT



XZJ5070ZYSQ5 Curb Weight: 4920/5090/5040kg Rated Payload: 2250/2080/2130kg Dustbin Volume: 6m³ Vehicle Model: 6365/6750/6645 x 1950 x 2400mm



XZJ5160ZXXD5 Curb Weight: 7600kg Rated Payload: 8005kg Max. Lifting Capacity: 14000 kg Vehicle Model:



Y7.151207VSD5

XZJ5250ZXXD5 Curb Weight: 11680kg Rated Payload: 13190/13125kg Max. Lifting Capacity: 20000kg Vehicle Model:



XZJ5180ZYSD5 Curb Weight: 9600kg Rated Payload: 8205/8270kg Dustbin Volume: 12.5m³ 8405/8550 × 2500 × 2965

XZJ5021ZDJA5 Max.Weight: 1800kg Curb Weight: 1370kg Rated Payload: 300kg Dustbin Volume: 3.1



Curb Weight: 14570kg Rated Payload: 10300/10235kg **Dustbin Volume: 19m** Vehicle Model: 10115 × 2500 × 3380/3600/3690



XZJ5120ZDJD5 Max.Weight: 12495 Curb Weight: 6800k Rated Payload: 5500 Dustbin Volume: 12



Curb Weight: 1220k g Rated Payload: 450kg Max. Lifting Capacity: 1000kg Vehicle Model 4175 x 1520 x 1930mm

XZJ5160ZDJD5 Max.Weight: 15800kg Curb Weight: 8195kg Rated Payload: 7410kg

Vehicle Model: 7900 x 2490 x 3010mm



XZJ5031ZXXA5 Curb Weight: 1360kg Rated Payload: 2005kg Max. Lifting Capacity: 1500kg Vehicle Model 4370 x 1520 x 1940mm



XZJ5070TCAQ5

Dustbin Volume: 4m3

5840 × 2100 × 2600mm

Vehicle Model:

Curb Weight: 4680/4380kg Rated Payload:2490/2790kg

Curb Weight: 2940kg Rated Payload: 3650kg Max. Lifting Capacity: 3000kg Vehicle Model 4820 x 1880 x 2200mm



XZJ5120GXWD5

Curb Weight: 7295kg

Dustbin Volu

Rated Payload: 5005kg

XZJ5180TDYD5

ISD210 50/155k

00m)/11050(80m)kg

ne: 6.5 Vehicle Model: 7110 x 2430 x 3050mm

XZJ5070ZXXQ5

ehicle Model: 4183 × 1600 × 1960r



7230 × 2490 × 3040mm

XZJ5180GXWD5





XZJ5251TDYD5 Curb Weight: 14900kg The Standard Model/engine ISD245 50/180kw Gun Range: ≥120m Water Tank Volume: ≥14m³ Vehicle Model: 11150 x 2500 x 3900mm



XZJ5071TSLQ5

Spray Water Cleaning Width: 2.5–3.5m Low-pressure Cleaning Flushing Width Water Gun Range: ≥38m Water Tank Volume: 9100m Vehicle Model: 9372 x 2550 x 2960mm



XZJ5183GQXD5

XZJ5184GQXD5 Curb Weight: 7670/7460kg Rated Payload: (10200/10135)/(10410/10345)kg Dustbin Volume: 10.6/10.8m² (8050 × 2520 × 2920)/(8050 × 2520 × 2910)mn

XZJ5250GQXD5 Curb Weight: 16460kg Rated Payload: 8410/8345kg Dustbin Volume: – Vehicle Model: 10525 x 2500 x 3785mm

XZJ5070TXSQ5

6700 × 2090 × 2430m

1

ACJOU/UT XSQ5 Curb Weight: 5660kg Dustbin Volume: 3.2m³ Water Tank Volume: 4500L Max.Sweeping Efficiency: 64000m²/h Vehicle Model:

XZJ5100TXSQ5 Curb Weight: 7250kg Dustbin Volume: 3.5 Water Tank Volume: . . .ank Volume: 6200L Max.Sweeping Efficiency: 64000m²/h Vehicle Model: 7000 x 2200 x 2690mm



XZJ5250GQXS5



XZJ5160TXSD5 Curb Weight: 11980k Dustbin Volume: 7m Water Tank Volume Max.Sweeping Efficiency: 70000m²/h Vehicle Model:









9980/9760 x 2500 x 3600/3690mm



4370 × 1450 × 2190mm





XZJ5021TYHA5 Max.Total Design Mass:1800kg Volume of Water Tank:1600L Cleaning Width: 1.5m Max. Speed:90km/h



Spray Water Cleaning Width: 2.5–3.5m Low-pressure Cleaning Flushing Width >24m




Curb Weight: 4910kg Clean Height Range: ≥0-1735mm Clean Width Range: ≥0-200mmm Water Tank Volume: 5000L Vabicle Model:

MINING HYDRAULIC TUNNELING DRILL JUMBOS

Coverage area(width x height, mm): 6600 x 6630 Max. coverage area(m²): 35 Overall Weight (kg): 13300









DRILLING JUMBO ------

Coverage area(width x height, mm): 11212 x 7677 Max. coverage area(m²): 72 Overall Weight (kg): 25000







XUL514D Empty weight(t): 38 Rated load capacity(t): 14 Bucket capacity(m³): 6 Transport dimention 10730 x 2836 x 2570 n(L × W × H, mm)

XCF2512K

Rated lifting capacity:25t Load Center:1200mm

Max. Lifting Height:4000mm Rated power: 185kW/2200rpm

UNDERGROUND LOAD HAUL DUMP



XUL202

Empty weight(t): 6.9 Rated load capacity(t): 2 Bucket capacity(m³): 1 Transport dimention(L × W × H, mm) 6172 × 1300 × 1890 (1990)

Rated lifting capacity: 45t. Number of Stacking: 5-4-3 Rated power: 265/2100kW/rpm



Empty weight(t): 13.2 Rated load capacity(t): 5 Bucket capacity(m³): 2 Transport dimention 7120 x 1790 x 2010 ention(L × W × H, mm)



Empty weight(t): 18.5 Rated load capacity(t): 7 Bucket capacity(m3): 3 Transport dimention 8790 x 2250 x 2285 ort dimention(L x W x H, mm)

• FORKLIFT

Coverage area(width × height, mm): 15725 × 13075 Max. coverage area(m²): 180 Overall Weight (kg): 47500

XUL410 Empty weight(t): 28 Rated load capacity(t): 10 Bucket capacity(m³): 4 ention(L × W × H, mm) Transport dimentic



PORT MACHINERY



CONTAINER REACH STACKER



XCF1612K/1606K

Rated lifting capacity:16t Load Center:1200/600mm Max. Lifting Height:4000mm Rated power: 142kW/2300rp

• EMPTY CONTAINER HANDLER



TELEHANDLERS

Rated lifting capacity:12t
Load Center:600mm
Max. Lifting Height:9.62m
Rated power: 129kW/2200rpm

Rated lifting capacity:35t Load Center:1200mm Max. Lifting Height:4000mm Rated power: 185kW/2200rpm

XCF3512K

CONCRETE MACHINERY

● TRUCK-MOUNTED CONCRETE BOOM PUMP

V7 DURABLE SERIES



HB37V Chassis: SINOTRUK Drive Type: 4 x 2 Vertical Reach: 36.5m



HB39V Drive Type: 6 x 4 Vertical Reach: 39.1m

HB43V Drive Type: 6 x 4 Vertical Reach: 43m

HB50V

Drive Type: 6 x 4 Vertical Reach: 49.1m

HB52V Drive Type: 6 x 4 Vertical Reach: 51.5m

HB58V Drive Type: 8 x 4 Vertical Reach: 57.5m







● TRAILER-MOUNTED CONCRETE LINE PUMP

HBT9018V

TRUCK-MOUNTED **CONCRETE SPRAYING MACHINE**





VEHICLE-MOUNTED



HBC10022V is: SINOTRUK Theor.Concrete Output: 55/100m3/h



crete Output: 50m3/h

HBT6013V ete Outnut: 40/65m³/h

ete Output: 60/115m³/h ressure:9/18Mpa





CONCRETE LINE PUMP



G04V Chassis XCMG Drive Type: 4 x 2

G06V SINOTRUK

TRUCK-MOUNTED CONCRETE MIXER

G08V

XCMG/SINOTRUK Drive Type: 6 x 4 Mixing Capacity:8m²



Chassis: XCMG/SINOTRUK

Drive Type: 6 x 4 Mixing Capacity:10m³

Chassis: XCMG/SINOTRUK

Drive Type: 6 x 4 Mixing Capacity:12m³



Drive Type: 4 x 4

Max.Pump Pressure: 12/22Mpa Max.Pump Height:300m



Drive Type: 4 x 2/6 x 4 Mixing Capacity:6m³






00



CONCRETE BATCHING PLANTS



Nominal Capacity of Mixer:2000L Theor. Continuous Production efficiency HZ\$270V Nominal Capacity of Mixer:4500L Theor. Continuous Production eff

PROJECT HZS60VG Nominal Capacity of Mixer:1000L Theor. Continuous Production of HZS90VG HZS120VG HZS180VG Nominal Capacity of Mixer:3000L

MOBILE HZS40VY

HZS60VY HZS75VY Nominal Capacity of Mixer: 1500L



XG1008DC

Maximum Load Capacity:230kg

Maximum Working Height:15m

Maximum Load Capacity:680kg

• CONCRETE PLACING BOOM



SPECIAL VEHICLE

AERIAL WORKING PLATFORM



HZS180V

Nominal Capacity of Mixer:3000L Theor. Continuous Production effici 160m³/h



XG1012HD XG1212HD Maximum Working Height:12m Maximum Load Capacity:320kg Total Weight:2900kg Maximum Working Height:10m Maximum Load Capacity:450kg Total Weight:2620kg



XG1823RT orkina Heiaht-18m Maximum Load Capa Total Weight:8000kg





XGS43

Maximum Working Height:20.6m Maximum Load Capacity:350kg





AP50F5









XG0807HD XG0807HDW orking Height:7.8m Working Height:7.8m Maximum Load Ca acity:230kg Maximum Load Capacity:230kg



Maximum Working Height:12m Maximum Load Capacity:320kg



XGS24





XG1412HD

Total Weight:3100kg

Maximum Working Height:58.6m Maximum Load Capacity:450kg Total Weight:27900kg



XG1412DC Maximum Working Height: 13.4m Maximum Working Height:13.8m Maximum Load Capacity:320kg Maximum Load Capacity:320kg Total Weight:3100kg



Maximum Load Capacity:460kg Total Weight:17200kg

Working Height:28.2m



XGS34 Maximum

XG1523RT

Total Weight:6400kg

XGA16AC Maximum Working Height:15.8m Maximum Load Capacity:227kg Total Weight:6500kg XGA16 Maximum Working Height:16.05m Maximum Load Capacity:230kg Total Weight:7100kg



XG1012DC

XXXXX

XG1614HD

Maximum Working Height: 15.8m

Maximum Load Capacity:350kg

Maximum Load Capa Total Weight:2620kg

n Working Height:10m

Maximum working neight.o-Maximum Load Capacity:460 Total Weight:19300kg



XGS40 Maximum m Working Height:40.2m

XG1008HD

XXXXX

XG1614DC

Maximum Load Ca

Total Weight:3700kg

Maximum Working Height: 15.8m

Maximum Load Ca

n Working Height:10m





Rated Working Height:62m



XGS40K





Container load:4260kg



XGS50K





DG100





DG88C1

• FIRE TRUCK

Throw distance:20-30m

JY10

XR180D/ ||

Φ1800/Φ160

XR360E

Rated power: 345kW Maximum drilling diameter: Ф 2600/ Ф 2300mm

Rated Power: 194kW Max.Drilling Diameter:

Max.Drilling Depth: 60m Operating weight: 60000



XR200E

Max.Drilli

Rated Power: 212kW Max.Drilling Diameter:

ng Depth: 65m weight: 63000/650



Rated Working Height:54m

Rated load on platform:500kg



Tank volume: 8.2m

ed:294/1900KW/r/m



DG34G1

Rated Working Height:34m



Shearing Force: 244kN Maximum Lifting Capacity of Main hook:



XR150D ||

Rated Power: 150kW Max.Drilling Diameter:

Max.Drilling Depth: 56m

• ROTARY DRILLING RIG

PILING MACHINERY

XR130E

Rated Power: 169kW Max.Drilling Diameter: Ф1300/Ф1500mm

Max.Drilling Depth: 50m



Rated Power: 116kW Max.Drilling Diameter: Max.Drilling Depth: 24m



XR460D



XR280E

Rated power: 315kW

Maximum drilling depth: 94m

Φ3500mm Max.Drilling Depth: 132m Operating weight: 185000kg • TRENCH CUTTER



XR320D

Rated Power: 298kW Max.Drilling Diameter:

Max.Drilling Depth: 91m

XRGODE
Rated power: 399kW
Maximum drilling diameter:

04000mm
Maximum drilling depth: 150m
Operating weight: 225000kg



XR160E

XR360

Rated Power: 298kW Max.Drilling Diameter:

Max.Drilling Depth: 92m

Rated Power: 150kW Max.Drilling Diameter:

Max.Drilling Depth: 56m

Φ 1500/ Φ 1300*mm



CONTINUOUS FLIGHT AUGER (CFA)



XG500E



XR220D/II

Φ2000mm Max.Drilling Depth: 67m Operating weight: 76000kg



XR240E

Rated power: 399kW ım drilling diameter

Ф3000/Ф2800r

Rated Power: 270kW Max.Drilling Diameter: Ф2200/Ф2000*mm



Maximum torque of cutting wheel: 2*80KN · m Total weight: 125t



Maximum torque of cutting wheel: 2*80KN · m Total weight: 135t



Total weight: 175t





Rated Power: 169kW Max.Drilling Diameter:




Φ800mm Max.Drilling Depth: 18m Total weight: 49t



Rated Power: 212kW Max.Drilling Diameter: Φ1000mm Max.Drilling Depth: 20m Total weight: 65t

NON-EXCAVATION MACHINERY



Jacking shield motor power(kW):18.5 Jacking shield torque(kN · m):19 Jacking shield rotating speed(r/min):7 Main jacking oil cylinder thrust(kN):1000 x 2

XDN1500

Jacking shield motor power(kW):30 x 2 Jacking shield torque(kN · m):275 Jacking shield rotating speed(r/min):4.2 Main jacking oil cylinder thrust(kN):2000 x 4

Jacking shield motor power (kW): 22 Jacking shield torque (kN · m): 15.3 Jacking shield rotating speed (r/min): 13.7

XDN1800

Jacking shield motor power (kW): 30×3 Jacking shield torque (kN \cdot m): 412 Jacking shield rotating speed (r/min): 4.2 Main jacking oil cylinder thrust (kN): 2000 \times 4

Jacking shield motor power(kW):18.5 Jacking shield torque(kN · m):22 Jacking shield rotating speed(r/min):6

Main jacking oil cylinder thrust(kN):1000 x 2

Jacking shield motor power(kW):22 Jacking shield torque(kN · m):9.76 Jacking shield rotating speed(r/min):16.6 Main jacking oil cylinder thrust(kN):1000 × 2

XDN800HL Jacking shield motor power(kW):30 Jacking shield torque(kN · m):59 Jacking shield rotating speed(r/min):4.7


Jacking shield motor power(kW):45 Jacking shield torque(kN · m):195 Jacking shield rotating speed(r/min):6

Main jacking oil cylinder thrust(kN):1500 x 2

HORIZONTAL DIRECTIONAL DRILLING RIG




Rated power (kW/r/min): 81/2200 Maximum push/pull force (kN): 130 Maximum rotation torque (N · m): 3000



Rated power(kW/r/min):154/2200 Maximum push/pull force(kN):370

Maximum rotation torque(N · m):13200 Overall size(mm):6200 x 2280 x 2450

XZ2200 Rated power (kW/r/min): 2 x 242/2100



XZ150E

Rated power (kW/r/min): 179/2200 Maximum push/pull force (kN): 420/500 Maximum rotation torque (N · m): 18500 Weight (t): 11.2 Overall size (mm): 6500 x 2250 x 2450

XZ3600 Rated power (kW/r/min): 2 × 264/2100 Maximum push/pull force (kN): 3600



Rated power (kW/r/min): 113/2200

Weight (t): 8.5 Overall size (mm): 5900 x 2250 x 2400

Rated power(kW/r/min):194/2200 Maximum push/pull force(kN):480

Weight(t):13.3/13.5

Maximum rotation torque(N · m):27000

m push/pull force(kN):480/960

Maximum push/pull force (kN): 225 Maximum rotation torque (N · m): 6350

XZ5060 Rated power(kW/r/min):2 x 354/1900 Maximum push/pull force(kN):5300



Maximum push/pull force(kN):230/270 Maximum rotation torque(N · m):6500 Weight(t):8.5 Overall size(mm):6100 x 2250 x 2300



Rated power(kW/r/min):221/2100 Maximum push/pull force(kN):730 Maximum rotation torque(N · m):35000



Rated power(kW/r/min):221/2100 Maximum push/pull force(kN):970 Maximum rotation torque(N · m):35000

Rated power(kW/r/min):133/2200



Rated power (kW/r/min): 154/2200 Maximum push/pull force (kN): 345 Maximum rotation torque (N · m): 12600

Overall size (mm): 6200 x 2280 x 2450



Weight (t): 10

Rated power (kW/r/min): 264/2100 Maximum push/pull force (kN): 1795 Maximum rotation torque (N · m): 50500



Jacking shield motor power (kW): 22 Jacking shield torque (kN·m): 15.3 Jacking shield rotating speed (r/min): 13.7 Main jacking oil cylinder thrust (kN): 1000

Overall size (mm): 11680 x 2760 x 3540









Rated pow Maximum



XZ11000

Rated power(kW/r/min):3 × 410/1900 Maximum push/pull force(kN):11000

MINING MACHINERY

• EBZ SERIES ROADHEADER



EBZ200R

Total power (kW): 347
Positioning cutting height (mm): 4800
Positioning cutting width (mm): 6040 Overall weight (t): 80

EBZ160 Total power (kW): 250 Positioning cutting height (mm): 4800/4500 Positioning cutting width (mm): 5400/5000

EBZ200M-2H Total power (kW): 310 Cutting range height (mm): 4700 Cutting range width (mm): 5700 Total weight (t): 65 EBZ160L Total power (kW): 250 Positioning cutting height (mm): 4100 Positioning cutting width (mm): 4800

EBZ230 Total power (kW): 377
Positioning cutting height (mm): 4800
Positioning cutting width (mm): 6040
Overall weight (t): 80

EBZ260 Total power (kW): 410.5 Positioning cutting height (mm): 5030 Positioning cutting width (mm): 5950 Overall weight (t): 85

EBZ160E

Total power (kW): 250

ing cutting height (mm): 4900

EBZ200L Total power (kW): 310 Overall weight (t): 53

EBZ260M-2H Total power (kW): 392 Cutting range height (mm): 5150 Cutting range width (mm): 5200 Total weight (t):100

EBZ200E Total power (kW): 310 Cutting range height (mm): 4700

EBZ260M-4H Total power (kW): 392 Cutting range height (mm): 5150 Cutting range width (mm): 5200

Total weight (t):100

EBZ200A Total power (kW): 325

Positioning cutting height (mm): 5030/4650

Overall weight (t): 120

Total power (kW): 568.5 Positioning cutting height (mm): 5700 Positioning cutting width (mm): 7100

EBZ320

• XTR SERIES BOOM-TYPE ROADHEADER



Cutter Motor Po ver: 180/110kW XTR4/230 Total power (kW): 230/135 Cutting range height (mm): 4600 Cutting range width (mm): 5100

XTR6/260 **Cutter Motor Po**

XSL5/280



Total weight (t):125

Total power (kW): 320/240 Cutting range height (mm): 6600 Cutting range width (mm): 7600



Cutting height: 7.2m Cutting width: 7.2m



Total power (kW): 500 Cutting range height (mm): 8520 Cutting range width (mm): 10230

Total weight (t): 218



XSL20/1000 Maximum passing diameter (mm): Φ610 Drilling depth (m): 2000 (Φ114) Maximum lifting force of feeding system (kN): 1000 Maximum recurs of the Overall weight (t): 47.5 ce of the feed system (kN): 260




Maximum passing diameter (mm): Φ500 Drilling depth (m): 500 (Φ89)

Maximum lifting force of feeding system (kN): 280



ım fe

Overall weight (t): 55



Maximum passing diameter (mm): $\,\Phi$ 820 Drilling depth (m): 3000 ($\,\Phi$ 114)

Maximum lifting force of feeding system (kN): 1200

XSL12/600



HEAVY-DUTY TRUCK

CARGO TRUCK

XGA1160 Driving type: 4x2 Engine: 160/200/240/270HP Transmission: 6/8/9 GVW:18T

XGA1250 Driving type: 6x4 Engine:240/270HF

Overall size:9.73 × 2.5 × 2.88m

XGA1310 Driving type: 8x4 Engine:300/350/375/400/460HI

l size:12 × 2.5 × 3.9m

DUMP TRUCK

XSC5/280

Overall weight (t): 23

XGA3160 Driving type: 4x2 Engine: 220HP

ransmission: 8 GVW:20-25t

9 00 XGA3250 Driving type: 6x4 Engine:330/336/371/375/420/430HP

XGA3310 Driving type: 8x4 Engine:371/375/420HP

9 9 99

l size:10 × 2.5 × 3.4m

TRACTOR

XGA4180 priving type: 4x2 ngine:270/371/375/460HP

XGA4250 Driving type: 6x4 Engine:350/371/375/430/460/500/550HP Transmission:9/12/16 GVW:31T



Max. Travel Speed:100km/h Max. Grade Ability:60% Max. Lifting Capacity:16000kg



Max. Travel Speed:100km/h Max. Lifting Capacity:6000kg

Max. Dragging Capacity:98 Bucket Capacity:0.4m³





Max. Travel Speed:100km/h Farthest Throw Distance:22m

Max. Throw Amount:150m3/h



Max. Travel Speed:100km/h Max. Grade Ability:60%

Max. Dragging Capacity:98 Lighting Power:4 x 1000w

XQC700





XZJ5250TWXZ6

Suction Deep:30

Platform Rated Load:220kg Rated Working Height:1800

OTHERS

TRACTOR

RAT150-Rated Power: 110kW Drive Type: 4X4 Max. Pulling Force: 34kN **KAT1504**

KAT1004

Rated Discharge Pressu Rated Air Displacement

Rated Power: 42-400kW

Rated Power: 73.5kW Drive Type: 4X4 Max. Pulling Force: 24kN Max. Lifting Capacity: 25kN Rated Power: 82kW Drive Type: 4X4 Max. Pulling Force: 26kN Max. Lifting Capacity: 25kN **KAT1604 KAT1804** Rated Power: 118kW 158HP Drive Type: 4X4 Max. Pulling Force: 36kN Max. Lifting Capacity: 36kN

Stationary Diesel Engine Screw Air Compressors Rated Discharge Pressure: 0.7–2.5MPa

ssure: v./-_. ent: 4–33m³/min

Rated Power: 132kW Drive Type: 4X4 Max. Pulling Force: 40kN Max. Lifting Capacity: 36kN

KAT1104

Rated Power: 91kW Drive Type: 4X4 Max. Pulling Force: 28kN Max. Lifting Capacity: 31kN **KAT2004** Rated Power: 147kW Drive Type: 4X4 Max. Pulling Force: 43kN Max. Lifting Capacity: 40kN

KAT1204

Rated Power: 92kW Drive Type: 4X4 Max. Pulling Force: 31kN Max. Lifting Capacity: 31kN **KAT2204**

KAT1254

Rated Power: 97.5kW Drive Type: 4X4 Max. Pulling Force: 30kN Max. Lifting Capacity: 31kN Rated Power: 162kW Drive Type: 4X4 Max. Pulling Force: 48kN Max. Lifting Capacity: 50kN

KAT2404 Rated Power: 176kW Drive Type: 4X4 Max. Pulling Force: 52kN Max. Lifting Capacity: 50kN

KAT1304

KAT1404 KAT1454 Rated Power: 105kW Drive Type: 4X4 Max. Pulling Force: 32kN Max. Lifting Capacity: 31kN Rated Power: 107kW Drive Type: 4X4 Max. Pulling Force: 33kN Max. Lifting Capacity: 31kN

KAT2804


KAT4404 Rated Power: 206kW Drive Type: 4X4 Max. Pulling Force: 60kN Max. Lifting Capacity: 50kN Rated Power: 323kW Drive Type: 4X4 Max. Pulling Force: 94kN Max. Lifting Capacity: 36kN

Electric Motor Reciprocating/ Piston Air Compressors

0.7-1.25MPa

0.8-3.2m3/min

• AIR COMPRESSOR



PIPELAYER



PMG20 PMG40 Rated Power: 169kW

Rated Power: 257kW
Operating Weight: 55000kg
Max. Lifting Capacity: 70000kg

XCB-P35/XCB-L35 Movement type: Plumbic a

Rated Discharge Pressure: 0.7–2.2MP Rated Air Displacement: 4–27m³/min Portable Electric Motor Screw Air Compressors Rated Discharge Pressure: 0.8–2.2MPa Rated Air Displacement: 10–23m²/min Rated Discharge Pressure: 0.8–2.2M Rated Air Displacement: 10–23m³/n Rated Power: 55–200kW

Excavation Diameter: 6200-6800mm

Portable Diesel Engine Screw Air Compressors



Operating Weight: 35000kg Max. Lifting Capacity: 45000kg PMG70 Rated Power: 239kW Operating Weight: 49000kg Max. Lifting Capacity: 70000kg PMG90

DIESEL GENERATOR SET

Cummins Diesel Engine Series Gen-set Power: 50-300kW

Gen-set Capacity: 63-375kVA

SDEC Diesel Engine Series Gen-set Power: 20-1240kW Gen-set Capacity: 25-1550kVA

XCB-P25/XCB-L25

XCC-PW20

P20

Rated elevating capacity: 2000kg

XCB-P18/XCB-L18 XCB-P18/XCB-L18 XCB-P1/Lithium (XCB-L) cid (XCB-P)/Lithium (XCB-L) Movement type: Plumbic acid (XCE Rated elevating capacity: 1800kg Max. elevating height: 3000mm Total weight: 3200kg

XCB-P30/XCB-L30



XCC-LW15 Rated elevating capacity: 1500kg Max. elevating height: 115mm Driving speed (full-load/non-load): 4.6/4.8 km/h Elevating speed (full-load/non-load): 20/25 mm/s Min. steering radius: 1330mm

Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L)
Rated elevating capacity: 3000kg
Max. elevating height: 3000mm

XCC-LW20 Rated elevating capacity: 2000kg
Max. elevating height: 115mm
Driving speed (full-load/non-load): 4.8/5.2 km/h
Elevating speed (full-load/non-load): 17/22 mm/s
Min. steering radius: 1336mm

ELECTRIC COUNTERBALANCED FORKLIFT TRUCK

Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 3000kg Max. elevating height: 3000mm Total weight: 5300kg

Rated elevating capacity: 2000kg
Max. elevating height: 120mm
Driving speed (full-load/non-load): 7.5/8.0 km/h
Elevating speed (full-load/non-load): 27/30 mm/s
Min. steering radius: 1585mm

XCB-P20/XCB-L20 Movement type: Plumbic acid (XCB-P)/Lithium (XCB-L) Rated elevating capacity: 2000kg Max. elevating height: 3000mm Total weight: 3930kg

ACC-PW20
Rated elevating capacity: 2000kg
Max. elevating height: 120mm
Driving speed (full-load/non-load):5.7/6.0 km/h
Elevating speed (full-load/non-load): 22/30 mm/s
Min. steering radius: 1490mm • ELECTRIC STACKER TRUCK SERIES ------

Novement type: Plumbic acid (XCB-P)/Lithium (XCB-L)
Rated elevating capacity: 2500kg
Max. elevating height: 3000mm
Total weight: 4040kg

Rated elevating capacity: 1200kg Max. elevating height: 2900/3200 mm Driving speed (full-load/non-load): 6.0/6.0 km/h Elevating speed (full-load/non-load): 105/150 mm/s



Max. elevating capacity: 1500kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 280/320 mm/s Min. steering radius: 1885mm Max. elevating capacity: 2000kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h

Rated elevating capacity: 1500kg

Rated elevating capacity: 1600kg Max. elevating height: 5500mm Driving speed (full-load/non-load): 6.0/7.0 km/h Elevating speed (full-load/non-load): 130/200 mm/s Max. elevating height: 2900/3400 mm Driving speed (full-load/non-load): 6.0/6.0 km/h Elevating speed (full-load/non-load): 105/150 mm/s Min. steering radius: 1540mm Min. steering radius: 1420mm • ELECTRIC FORWARD-MOVING STACKER TRUCK XCF-PG25

XCC-P20

XCS-P16

XCF-PSG16 Rated elevating capacity: 1600kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h

Max. elevating height: 4600mm Driving speed (full-load/non-load): 6.0/7.0 km/h Elevating speed (full-load/non-load): 130/200 mm/s Min. steering radius: 1550mm

XCF-PSG20

XCF-PG15 XCF-PG20



Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1920mm

XCS-P15

Max. elevating capacity: 2500kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 2050mm

Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1750mm

Max. elevating capacity: 2000kg Max. elevating height: 5000mm Driving speed (full-load/non-load): 10.5/10.5 km/h Elevating speed (full-load/non-load): 270/380 mm/s Min. steering radius: 1760mm